


## V-Cable for Mini-Line® Grade and Slope Control System

Mini-Line®

The V-cable is a standard Mini-Line® cable used for connection of the Mini-Line® Grade and Slope Control System. It is used to connect a HS301 Handset and one sensor type (grade sensor or slope sensor) to an asphalt paver.

The cable is designed for the environment on pavers. It is made of PUR jacketed coiled cables giving flexibility and protection against chemicals and abrasion. The connectors are fully encapsulated.

The cable lengths specified are the maximum recommended length used.

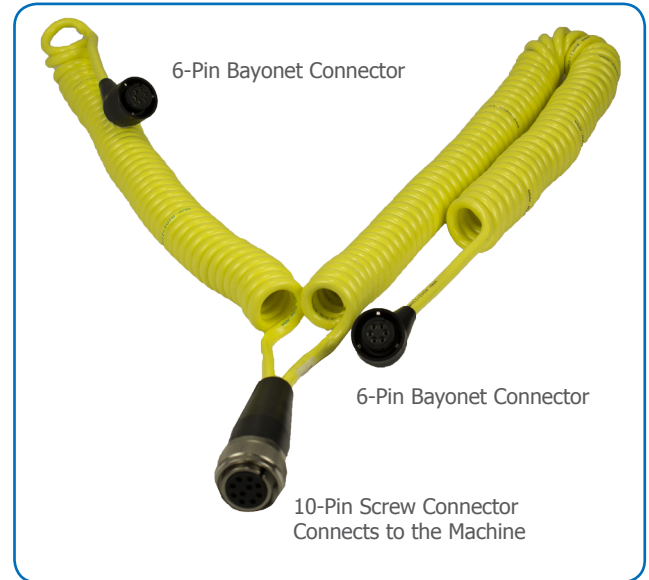

V-Cable Specifications	
Part Number	S-50433
Application	Connecting Mini-Line® Grade and Slope Control System to the Machine
Power Supply	12/24 Volt Systems (10-30 VDC)
Material	PUR Jacketed Cables
Dimensions, Cable Lengths	1 x 2.2m + 1 x 4.0m
Weight	1.0kg
Storage Temperature	-40°C to 85°C
Operating Temperature	-10°C to 70°C
Connector	1 x 10 Screw, Female 2 x 6-Pin Bayonet, Female 45° Angled